

THANKS FOR YOUR PURCHASE!

YOUR GRILL HAS BEEN FITTED WITH OUR ALPHA SMOKE PID BOARD, WHICH IS EQUIPED WITH DUAL CONTROL TECHNOLOGY. THIS ALLOWS THE USER TO CHOOSE BETWEEN OUR TWO FINELY TUNED BOARD OPERATIONS. READ BELOW FOR STANDARD OPERATION, AND TO CHOOSE YOUR CONTROL PREFERENCES.

PRESS POWER TO TURN ON, HOLD POWER FOR 2 SECONDS TO TURN OFF. PRESS AND HOLD THE "MODE" BUTTON TO ALTERNATE BETWEEN MODES
*IF GRILL LOOSES POWER IT WILL DEFAULT TO MODE 1.

MODE 1 PRECISION TEMP CONTROLLER

TO TURN CONTROLLER ON/OFF PRESS THE POWER BUTTON FOR 2 SECONDS PRESS AND HOLD THE "MODE" BUTTON TO ALTERNATE BETWEEN MODES

- YOUR GRILLS DEFAULT SETTING IS ALREADY OPTIMIZED FOR MOST TEMPERATURE RANGES. TO FINE TUNE EVEN FURTHER FOLLOW THE STEPS BELOW.

1. TO CHANGE SETTINGS PRESS AND HOLD THE MODE, UP, AND DOWN ARROWS FOR 2 SECONDS.

2. USING THE UP AND DOWN ARROWS ENTER YOUR DESIRED SETTING. HIT THE "MODE" BUTTON WHEN FINISHED.


NOTE: GRILLS DEFAULT SETTINGS WILL BE RESET WHEN UNPLUGGED.

°F	SILVERBAC°	GRILLA°	CHIMP°
DEFAULT:	-12-	-15-	-9-
-0°F	+20	+22	+16
0-45°F	16-20	19-21	13-16
46-75°F	12-16	15-18	9-12
75°F	8-12	10-14	6-8
+100°F	4-8	6-9	4-6

MODE 2 MORE SWING. MORE SMOKE.

- SCHEDULE BASED FEED CONTROL BASED ON INTERNAL GRILL TEMPERATURE.

- | | |
|-------------------------|-----------------------|
| 1 7 SEGMENT DISPLAY | 6 PROBE INPUT |
| 2 POWER INDICATOR LIGHT | 7 PROBE BUTTON |
| 3 POWER BUTTON | 8 TEMPERATURE CONTROL |
| 4 MODE BUTTON | 9 MOUNTING HOLES |
| 5 MODE INDICATOR | |

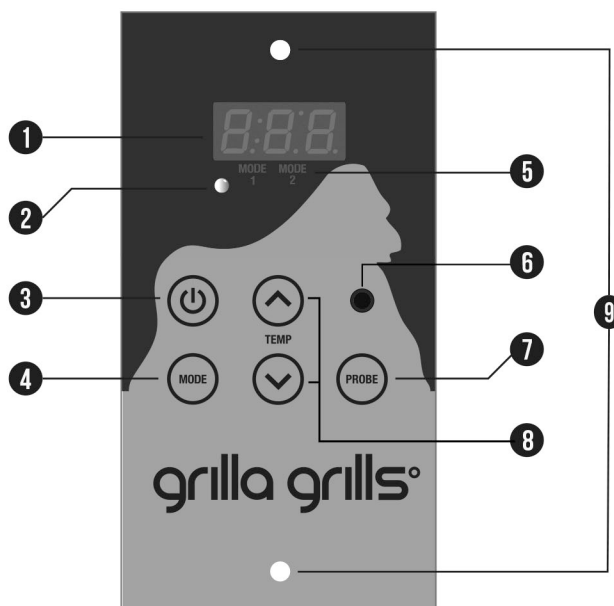

CHANGES TO YOUR GRILL MANUAL:

-CONTROLLER OPERATIONS SECTION-

1. ERL IS NOW 150°F FROM 110°F
2. DEFAULT TEMP SETTING IS NOW 250°F FROM 350°F